



# Bobcat®

## BACKHOE LOADERS

# B760

### MALAYSIA

Operating Weight

7960 kg

Engine Power

70 kW/ 94 HP

Max. Digging Depth  
(Retracted/Extended)

4633/5623 mm



*One Tough Animal.*

# B760 - SPECIFICATIONS

## Engine

Make/Model	Perkins/ 1104D-44T
Standard	EU Stage3 and EPA Tier3
Aspiration	Turbocharged
Number of cylinders	4
Displacement	4.4 L
Rated gross power	70 kW/ 94 hp
Rated speed	2200 rpm
Maximum torque	392 Nm
Fuel	Diesel
Cooling	Water

## Transmission

Make/Model	Carraro
Number of speeds (F/R)	4/4
Maximum speed	40.0 km/h

## Front Axle

Type	4WD
Oscillation	16 °

## Rear Axle

Make/Model	Carraro
Differential lock	Standard

## Hydraulic System

System type	Open center
Pump	Tandem gear pump
Flow	73 + 64 L/min

## Steering

Type	2WS
------	-----

## Brakes

Service	Hydraulic wet multi-disc, dual pedal braking
Parking	Mechanical control on rear axle

## Loader Performance

Bucket capacity GP	1.0 m <sup>3</sup>
Breakout force bucket	57.5 kN
Breakout force arm	57.9 kN
Rated operating capacity a max. height	3506 kg

## Backhoe Performance

Bucket capacity	0.18 m <sup>3</sup>
Max bucket breakout force	60.8 kN
Arm teatout retracted	40.1 kN

## Operating Weight

Base machine	7960 kg
--------------	---------

## Tires

Front/Rear	12.5-18/ 16.9-28
------------	------------------

## Service Capacity

Engine oil (with filters)	7 L	Hydraulic system	140 L
Cooling system	16 L	Transmission oil	16 L
Fuel tank	160 L	Axle oil front	9.1 L
Hydraulic tank	70 L	Axle oil rear	17.5 L

## Standard Features


Synchroshuttle transmission	Fully equipped dashboards
Mechanical control lever	Horn
Canopy	Mechanical suspension seat with seat belt and arm rest
4WD	Radio/ CD player
GP bucket	Reverse alarm
600mm backhoe bucket	Steering wheel knob
12V Aux	Storage areas
8 work lights (4 front, 4 rear)	Sun visor
Exterior and interior mirror	Tilted steering column
Floormat	USB port
Front and rear windshield and wiper	Camso Tires
Front headlights	

## Options

Autoshift transmission	GP bucket with cutting edge
Pilot controls with pattern selector	GP bucket with cutting edge & pallet forks
Cabin with fan	800mm backhoe bucket
Cabin with HVAC	4WD shaft guard
Extenable arm	Mudguard front
Hammer piping	Ride control
6 in 1 bucket	6 in 1 ready piping
GP bucket with pallet forks	Stabilizer Street pad

B-2013-EN-MY (11/21)

## Working Range

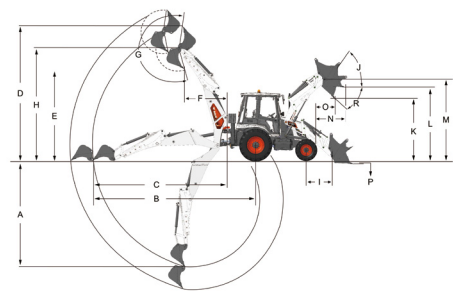


## Backhoe Dimensions

	Retracted	Extended
A Max. digging depth	4633 mm	5623 mm
B Max. reach from rear axle center	7115 mm	8063 mm
C Max. reach from swing center	5787 mm	6735 mm
D Max. digging height	5855 mm	6584 mm
E Max. dumping height	4052 mm	4783 mm
F Loading reach	1844 mm	2527 mm
G Bucket rotation angle	202 °	202 °
H Max. bucket hinge pin height	4910 mm	5641 mm

## Loader Dimensions

I Distance between hinge pin and front axle center	1133 mm
J Max. rollback angle, fully raised	64 °
K Dump height	2728 mm
L Load over height	3200 mm
M Height to hinge pin	3501 mm
N Max. reach at full height	1171 mm
O Dumping reach	753 mm
P Digging depth	127 mm
R Dump angle	43 °

## Dimensions

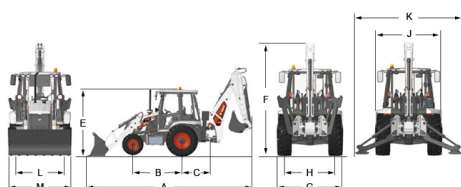

A Overall machine length in travel position	7425 mm
B Wheelbase	2193 mm
C Backhoe swing center distance	1328 mm
D Ground clearance	420 mm
E Cab height	2940 mm
F Machine height in travel position	3798 mm
G Machine width overall	2280 mm
H Rear wheel track	1720 mm
J Stabilizers up width	2273 mm
K Stabilizers down width	3708 mm
L Front wheel track	1961 mm
M Overall width with bucket	2280 mm



# Bobcat®

Doosan Bobcat Korea Co., Ltd.

[www.bobcat.com](http://www.bobcat.com)

Doosan is a Doosan Company. Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering products serving customers and communities for more than a century. Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries. ©2016 Bobcat Company. All Rights Reserved.

Certain specifications are based on engineering calculations and are not actual measurements. Specifications are provided for comparison purposes only and are subject to change without notice. Specifications for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of Bobcat units may show other than standard equipment.